



REV	ECRN	DATE
1	NEW PRODUCTION	20141113
2	印字内容变更	20150608

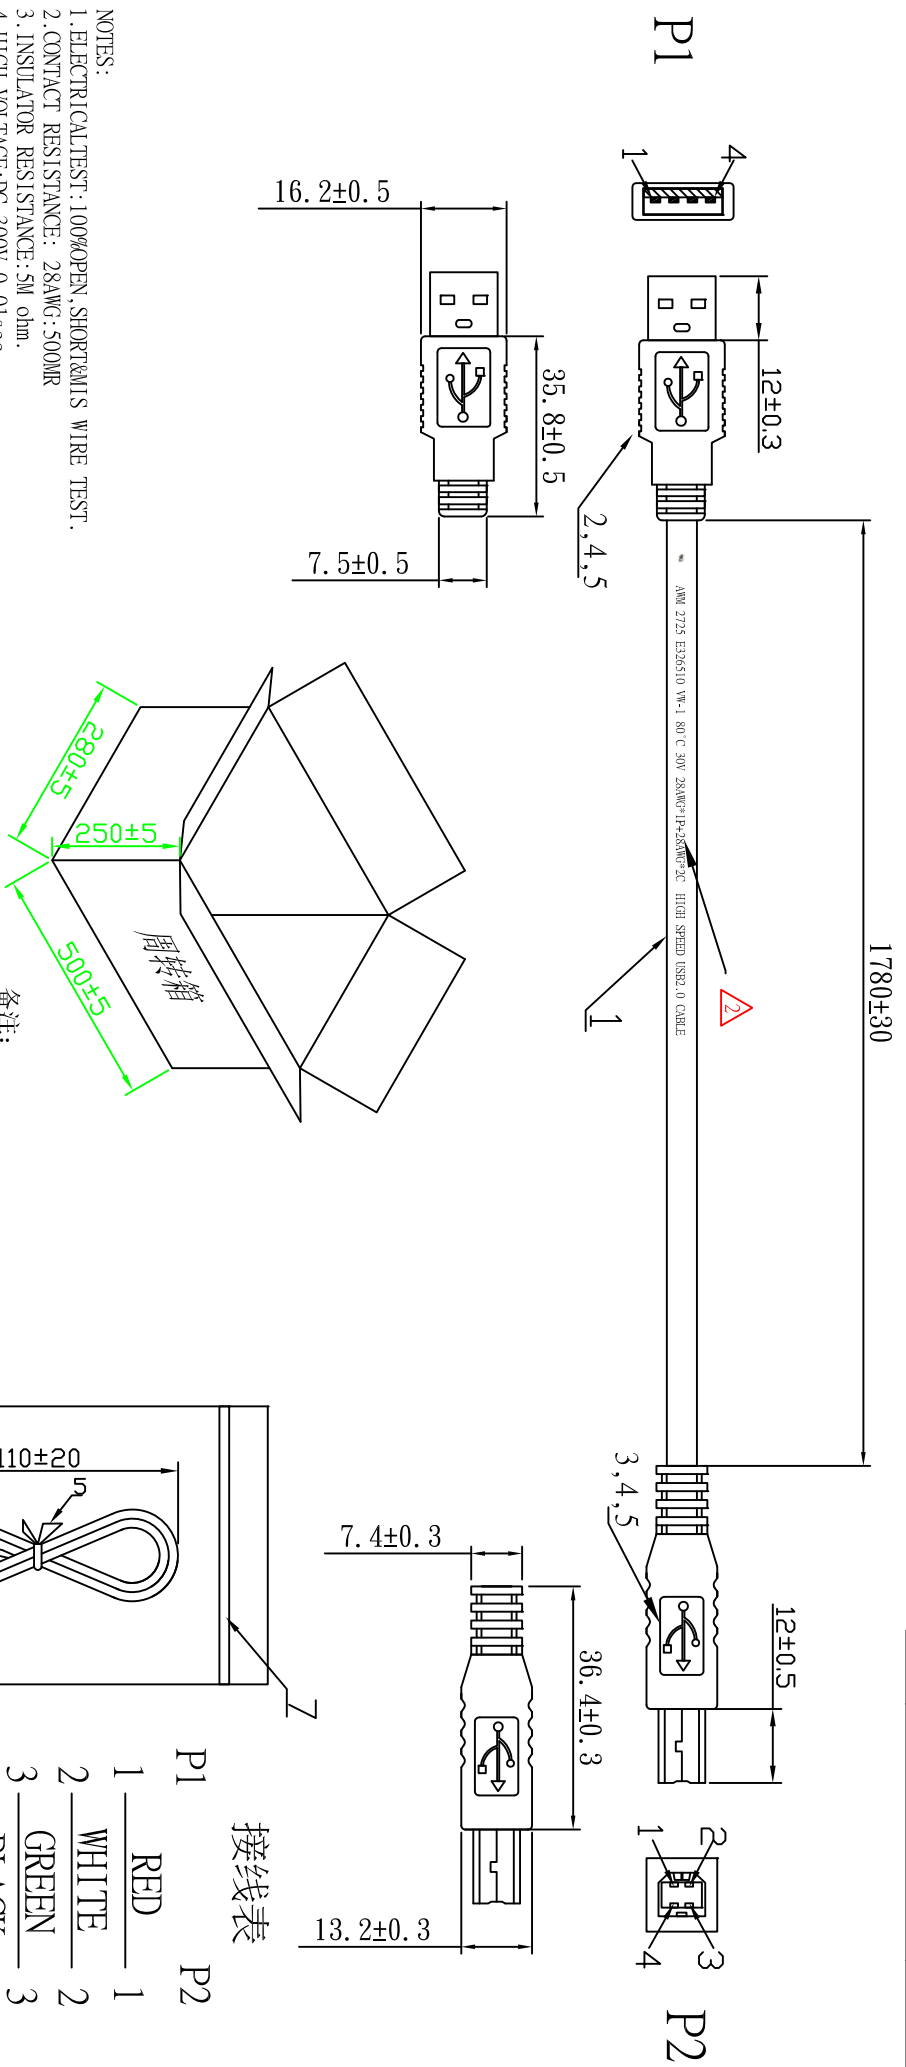

- NOTES:
1. ELECTRICAL TEST: 100% OPEN, SHORTCIRCUIT WIRE TEST.
 2. CONTACT RESISTANCE: 28AWG: 500MR
 3. INSULATOR RESISTANCE: 5M ohm.
 4. HIGH VOLTAGE: DC 300V 0.01sec.
 5. MUST BE ROHS COMPLIANT.

NO.	PART NO	ITEM	DESCRIPTION	QTY	UNIT
⑦	1.100150.0301R	PE BAG	100*150*0.05MM Red edge chain bag	1	PCS
⑥	1.000001.0400R	TIE	L=100mm COLOR BLACK	1	PCS
⑤	1.000008.0500R	TIN WIRE	TIN WIRE OD:0.8MM	2.5	G
④	0.045P01.0100R	MOLDING	PVC 45P BLACK	13.6	G
③	B.01004M.0N03R	CONNECTOR	CONNECTOR WHITE	1	PCS
②	B.01004M.0N01R	CONNECTOR	CONNECTOR WHITE	1	PCS
①	A.011X01.0402R	CABLE	UL2725 28AWG(7/0.12TC)*1P+28AWG(7/0.12TC)*2C+4L+B(32/0.10CCAM) JACKET PVC 60P BLACK OD:4.0±0.1MM L=1840MM±10MM	1	PCS

- 备注:
1. 把装好产品后的100*150 PE袋装入内箱;
 2. 每内箱装300个100*150小PE袋共300PCS产品;

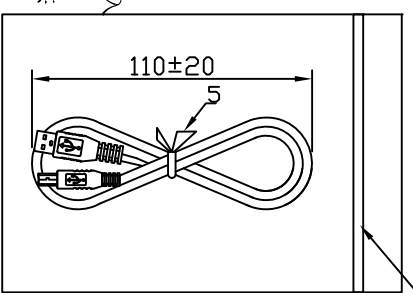

接线表

P1	P2
1 RED	1
2 WHITE	2
3 GREEN	3
4 BLACK	3
SHELL	4 SHELL

ROHS COMPLIANT

DRAWN BY	谢建军	20150608
CHECKED BY		
APPROVED BY		

PL
比例: FREE
单位: mm
TITLE: USB A/M TO USB B/M
DongGuan Penglian Electronics Co., Ltd
TEL: 076938835098/38835095 FAX: 076938835091

朋联电子有限公司
Customer: Seed Technology Limited
CUSTOMER'S ITEM: 321010025
DRAWING NO. ACCA-0545 DATE 2015.06.08