



REV	ECRN	DATE
1	NEW PRODUCTION	20141113
2	印字内容变更	20150608

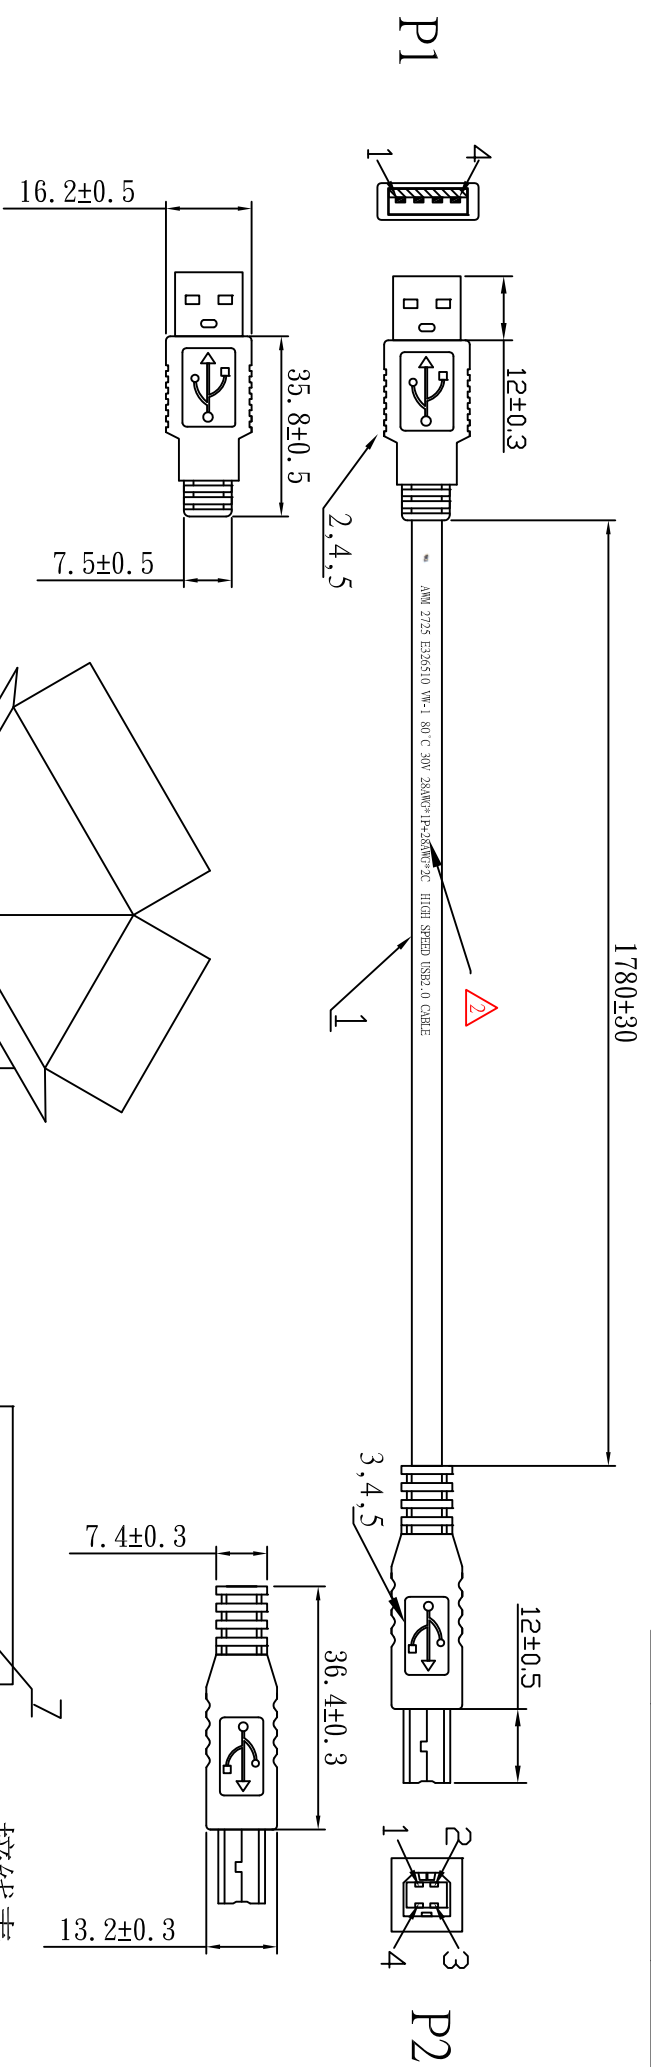

- NOTES:
1. ELECTRICAL TEST: 100% OPEN, SHORTCIRCUIT WIRE TEST.
  2. CONTACT RESISTANCE: 28AWG: 500MR
  3. INSULATOR RESISTANCE: 5M ohm.
  4. HIGH VOLTAGE: DC 300V 0.01sec.
  5. MUST BE ROHS COMPLIANT.

NO.	PART NO	ITEM	DESCRIPTION	QTY	UNIT
⑦	1.100150.0301R	PE BAG	100*150*0.05MM Red edge chain bag	1	PCS
⑥	1.000001.0400R	TIE	L=100mm COLOR BLACK	1	PCS
⑤	1.000008.0500R	TIN WIRE	TIN WIRE OD:0.8MM	2.5	G
④	0.045P01.0100R	MOLDING	PVC 45P BLACK	13.6	G
③	B.01004M.0N03R	CONNECTOR	USB B/M 4P PIN GOLDEN PLATED SHELL NICKEL PLASTIC: WHITE	1	PCS
②	B.01004M.0N01R	CONNECTOR	USB A/M 4P PIN GOLDEN PLATED SHELL NICKEL PLASTIC: WHITE	1	PCS
①	A.011X01.0402R	CABLE	UL2725 28AWG(7/0.12TC)*1P+28AWG(7/0.12TC)*2C+AL+B(32/0.10CCAM) JACKET PVC 60P BLACK OD:4.0±0.1MM L=1840MM±10MM	1	PCS

- 备注:
1. 把装好产品后的100\*150 PE袋装入内箱;
  2. 每内箱装300个100\*150小PE袋共300PCS产品;

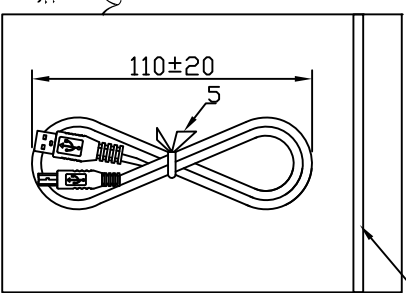

接线表

P1	P2
1 RED	1
2 WHITE	2
3 GREEN	3
4 BLACK	3
SHELL	4
SHELL	SHELL

ROHS COMPLIANT

DRAWN BY	谢建军	20150608
CHECKED BY		
APPROVED BY		

PL  
比例: FREE  
单位: mm  
朋联电子有限公司  
DongGuan Penglian Electronics Co., Ltd  
TEL: 076938835098/38835095 FAX: 076938835091

TITLE:	USB A/M TO USB B/M
SUPPLIER'S ITEM:	9.00ACCA0545.000R
CUSTOMER'S ITEM:	Seed Technology Limited
CUSTOMER'S ITEM:	321010025
DRAWING NO.	ACCA-0545
DATE	2015.06.08